

**RHN-T Graphite**

RHN-T is a high quality graphite laminate material in which exfoliated graphite is mechanically bonded to a 316 stainless steel tanged insert.

RHN-T has excellent mechanical strength, a wide temperature range and outstanding stress retention properties and is ideal for demanding applications. It can seal a wide range of fluids including steam, hydrocarbons and most chemicals.

**Thickness:** 1.0mm to 3.0mm

**Sheet Size :** 1500mm X 1500mm, 1000mm X 1000mm

**Colour:** Black

**Availability:** 316L as standard. Other materials, including 31803 and 321 are available on request.


|                  |                                      |              |
|------------------|--------------------------------------|--------------|
| Thickness        |                                      | 1.5mm        |
| Density          |                                      | 1.0 g/cc     |
| Insert Thickness |                                      | 0.1mm        |
| Compression      | ASTM F36 J                           | 30% to 37%   |
| Recovery         | ASTM F36 J                           | 20%          |
| Residual Stress  | BS7531 (40N/mm <sup>2</sup> @ 300 C) | 37 MPa       |
| Gas Leakage      | BS7531                               | <1.0 ml/min  |
| Ash Content      |                                      | 1.0% max     |
| Chloride Content |                                      | 45 ppm max   |
| Sulphur Content  |                                      | 1200 ppm max |
| Y value          | ASME                                 | 20.7 MPa     |
| M value          | ASME                                 | 2            |

A = Suitable subject to chemical compatibility.

B = Please contact our Technical Team.

C = Not Suitable

As the companies products are used in multiple applications and as the company has no control over the method of their use, the company excludes all conditions or warranties, expressed or implied by statute or otherwise. Any technical co operation is given for customers assistance only and without liability on the part of the company.

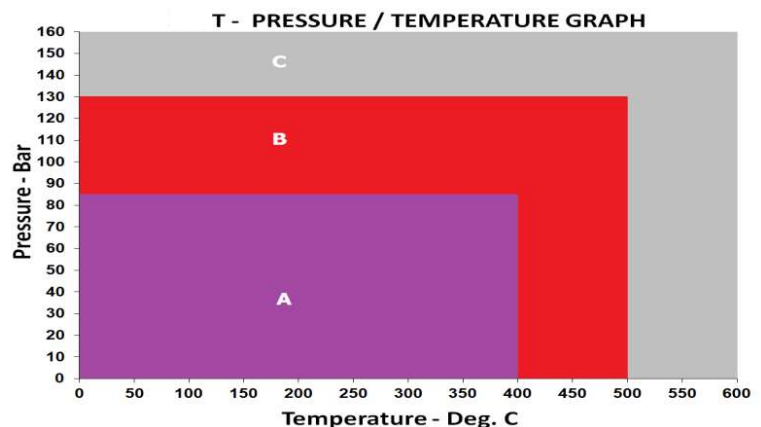

**\*\*The information given above is based upon average values and is no way intended as a warranty. The purchaser is deemed responsible for determining the suitability of the product for any application. All data relating to suitable uses and description information concerning our products are compiled from research and are believed to be reliable but are provided for guidance purposes only. The Company holds no legal or contractual responsibility for information supplied\*\***

